1.2VA SEALED TRANSFORMER EI30 SERIERS



ORDERING CODE


BV XX 2 S 15 010

- BV — Sealed Transformer
- XX — EI Lamination Size Example 20,30,38,42,48,54,60,66
- 2 — Input V: 1=115V, 2=230V
- S — Output Type: S=Single, D=Dual
- 15 — Output Voltage: 06=6V, 09=9V, 12=12V, etc.
- 010 — 010=1VA, 015=1.5VA, 300=30VA, etc.

FEATURES

- UL5085-1,-2 CQC Approved:
  UL file No.E177998
  CQC file No.：CQC09001230821
- Vacuum Filling
- Split Bobbin Design
- Self-Extinguishing Plastics UL94V-0
- Dielectric Strength:
  Input 115V: 2800Vrms
  Input 230V: 4200Vrms
- Inherently Energy Limited
- Resin Class B IEC 85
  (20,000 h Testing to IEC 216)
- Conforms to EN 61558 and EN 60950
- 100% Production Tested


OUTLINE DIMENSIONS

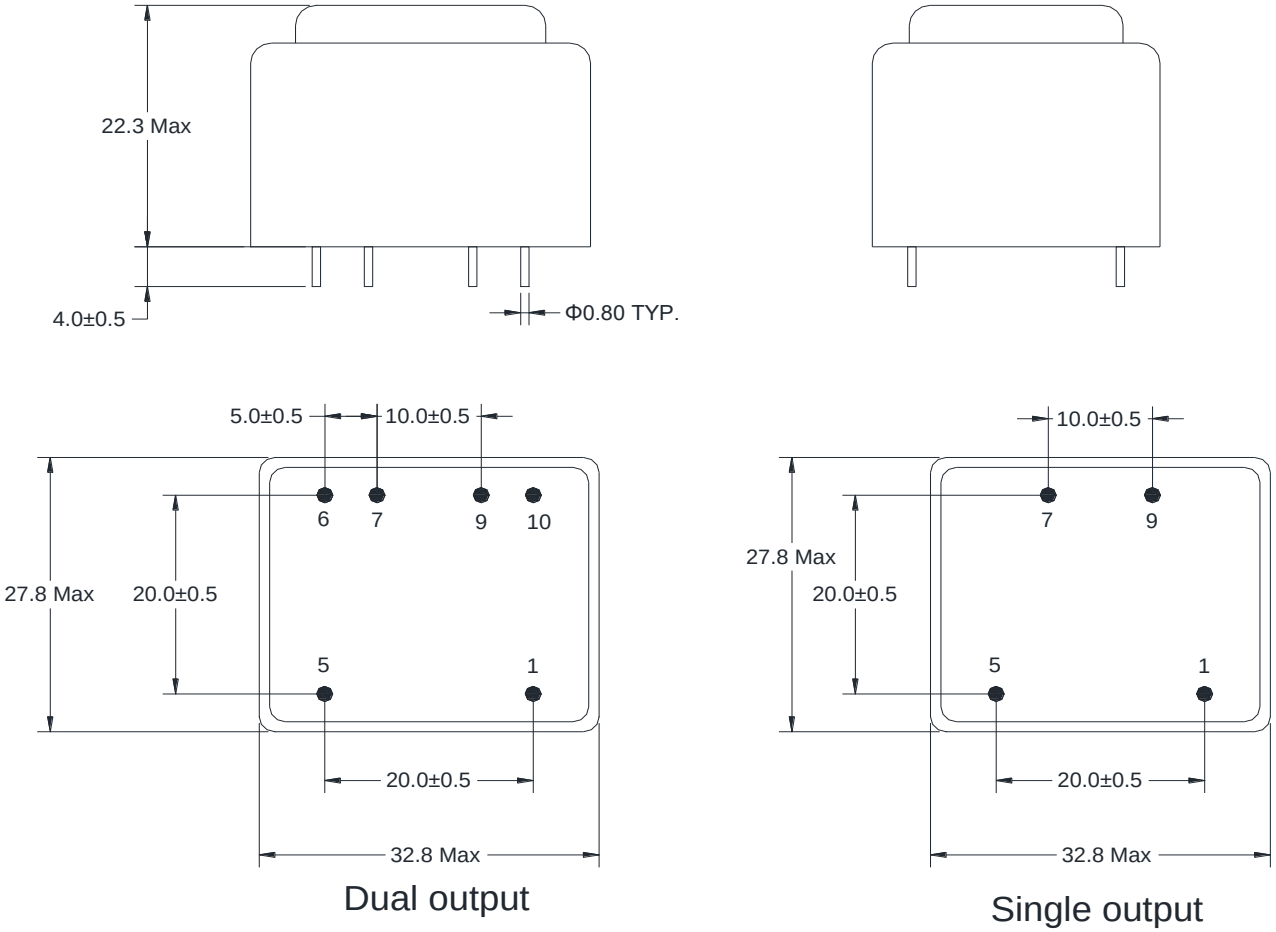


Dual output

Single output

SCHEMATIC DIAGRAM:

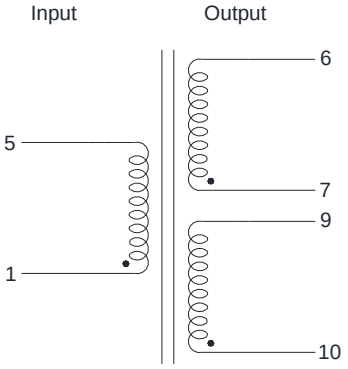

Dual outputs



Single output

ELECTRONIC SPECIFICATIONS

Order Number	Input Voltage	SEC.Voltage (V)	Rated Power (VA)	No-load Voltage (V)	Ambient TEMP. (℃)	Weight (g)	Certificate			
							VDE	UL	CQC	CE
BV301S06012	115V 50/60Hz	6	1.2	9.3 Max	T 70 B	70	●	▲		●
BV301S09012	115V 50/60Hz	9	1.2	17 Max	T 70 B	70	●	▲		●
BV301S10012	115V 50/60Hz	10	1.2	17 Max	T 70 B	70	●	▲		●
BV301S12012	115V 50/60Hz	12	1.2	19 Max	T 70 B	70	●	▲		●
BV301S15012	115V 50/60Hz	15	1.2	221.5 Max	T 70 B	70	●	▲		●
BV301S18012	115V 50/60Hz	18	1.2	27.5 Max	T 70 B	70	●	▲		●
BV301S24012	115V 50/60Hz	24	1.2	36.5 Max	T 70 B	70	●	▲		●
BV301D06012	115V 50/60Hz	2×6	1.2	2x9.3 Max	T 70 B	70	●	▲		●
BV301D09012	115V 50/60Hz	2×9	1.2	2x17 Max	T 70 B	70	●	▲		●
BV301D10012	115V 50/60Hz	2X10	1.2	2x17 Max	T 70 B	70	●	▲		●
BV301D12012	115V 50/60Hz	2×12	1.2	2x19 Max	T 70 B	70	●	▲		●
BV301D15012	115V 50/60Hz	2×15	1.2	2x22.5 Max	T 70 B	70	●	▲		●
BV301D18012	115V 50/60Hz	2×18	1.2	2x27.5 Max	T 70 B	70		▲		●
BV301D24012	115V 50/60Hz	2×24	1.2	2x36.5 Max	T 70 B	70		▲		●
BV302S06012	230V 50/60Hz	6	1.2	9.3 Max	T 70 B	70	●	▲		●
BV302S09012	230V 50/60Hz	9	1.2	17 Max	T 70 B	70	●	▲		●
BV302S10012	230V 50/60Hz	10	1.2	17 Max	T 70 B	70	●	▲		●
BV302S12012	230V 50/60Hz	12	1.2	19 Max	T 70 B	70	●	▲		●
BV302S15012	230V 50/60Hz	15	1.2	221.5 Max	T 70 B	70	●	▲		●
BV302S18012	230V 50/60Hz	18	1.2	27.5 Max	T 70 B	70	●	▲		●
BV302S24012	230V 50/60Hz	24	1.2	36.5 Max	T 70 B	70	●	▲		●
BV302D06012	230V 50/60Hz	2×6	1.2	2x9.3 Max	T 70 B	70	●	▲		●
BV302D09012	230V 50/60Hz	2×9	1.2	2x17 Max	T 70 B	70	●	▲		●
BV302D10012	230V 50/60Hz	2X10	1.2	2x17 Max	T 70 B	70	●	▲		●
BV302D12012	230V 50/60Hz	2×12	1.2	2x19 Max	T 70 B	70	●	▲		●
BV302D15012	230V 50/60Hz	2×15	1.2	2x22.5 Max	T 70 B	70	●	▲		●
BV302D18012	230V 50/60Hz	2×18	1.2	2x27.5 Max	T 70 B	70		▲		●
BV302D24012	230V 50/60Hz	2×24	1.2	2x36.5 Max	T 70 B	70		▲		●