

Specification for approval

Description(产品类型):	Linear transformer
Customer p/n(客户):	
ZETTLER p/n(赛特勒):	XZM-LE6622005
Revision(版本号):	PD1.0
Page(页数):	4

Drafted(制作): Li xiaoxu

Checked(审核): Chen chaolu

Approved(确认): He zongnian




PD1.0	2025/5/2	initial	Li xiaoxu
Rev.	Date	Description	Changed

Approved by Customer (客户确认) : _____

Friendly Reminder: Please help to sign this Spec when approve , and fax to our company .Or else, we will consider you have accepted it and make future order based on this Spec.

友情提示:请在签字确认后,按封面的传真号码回传给赛特勒磁电有限公司.如无回传,则视为默认,后续的相关订单将以按本承认书的规定为技术要求.

1. OUTLINE DRAWING(外形图):UNIT(单位): mm

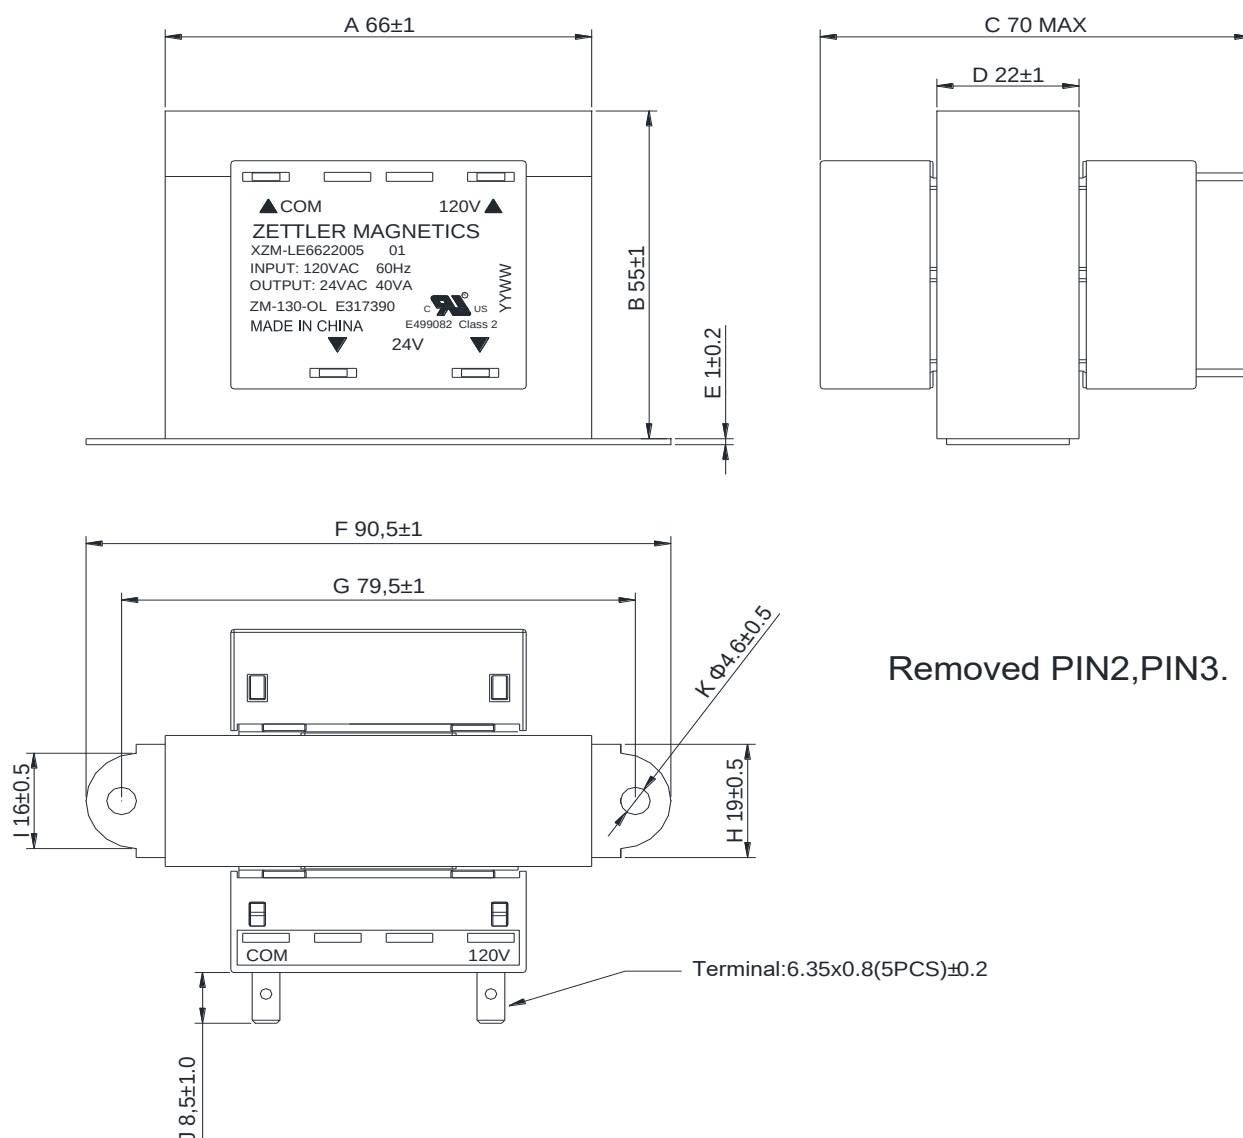


2. Marking(标记图)



YY:Year/年
WW:Week/周



3.SCHEMATIC(原理图):

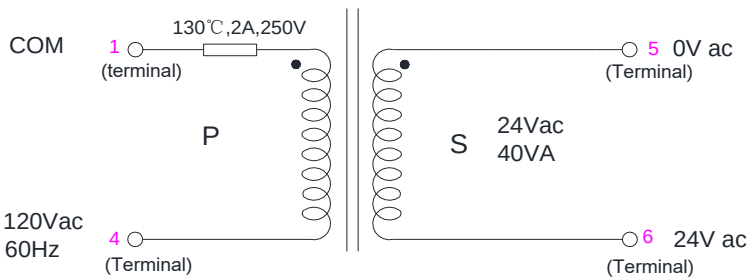

4.ELECTRICAL SPECIFICATION(电气特性测试):

TEST TEMPERATURE(测试温度)@25±2℃:

Item 项目	Terminal 端子	Specification 规格值	Test condition 测试条件
Excitation current 空载电流(mA)	1--4	165 MAX	Input 输入: 120V/60Hz
Rated load voltage 负载电压(V)	5--6	24V±1 @ 1.67A	Input 输入: 120V/60Hz
No load voltage 空载电压(V)	5--6	27V±1	
Insulation resistance 绝缘阻抗	P--S	100MΩ MIN	DC500V /1min
HI-POT Voltage 耐压	P----S,C	3.0KV	1mA/60S/60Hz
	S--C	1.0KV	

5. PRECAUTIONS FOR USE (产品使用注意事项):

Ambient temperature range(使用环境温度范围): -25~+65℃

Storage temperature range(保存温度范围): -25~+80℃